


Central loose tube cable, universal-use, SWA-steel wire armour, FRLSZH sheath - green, Dca, 01x08-fibers OM4

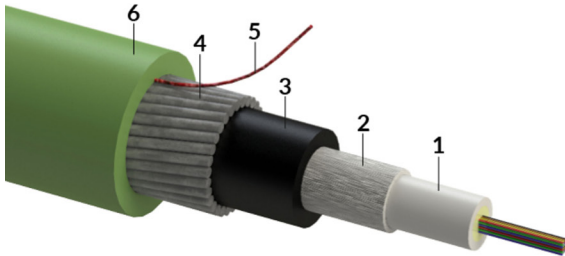

1. Gel filled PBT loose tube with optical fibers
2. Water-blocking e-glass yarn
3. LDPE UV stable inner jacket
4. Zn galvanized steel wire armour fixed by PET tape
5. Rip-cord
6. FRLSZH UV stable outer jacket

030.6310.B.1/ similar product

PRODUCT-NO	PRODUCT CODE
R855698	CLT-D01x3.0-QEO1H-W1H_U-SDNR-01x08-M4-gn
CABLE TYPE	CABLE VERSION
Central loose tube cable	n.a
CABLE APPLICATION	DIN/VDE CODE
universal-use	U-DQ(ZN)HBH wbg (R 0,63vzk)
CPR CLASSIFICATION	DOP NO.:
Dca-s2,d2,a1	D9007

GENERAL DESCRIPTION

Steel wire armoured central loose tube cable with good mechanical and thus full rodent protection. The cable features a two jacket construction (both sheath with FRLSZH) with up to 24 fibers maximum and is suitable for indoor or outdoor duct or direct buried installation.

TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Fiber type	OM4
Fiber count	8
Loose-tube count	1
Loose tube nominal diameter	3
Inner jacket nominal thickness	1.1
Steel wire nominal diameter	0.63
Outer jacket nominal thickness	1.3
Cable outer diameter	9.9
Cable informative weight	180.0 kg/km / 121 lbs/1000ft
Standard put-up length on drum	2100 m ± 5%
Outer jacket material	UV stable FRLSZH
Jacket colour	green

Central loose tube cable, universal-use, SWA-steel wire armour, FRLSZH sheath - green, Dca, 01x08-fibers OM4

DESCRIPTION	VALUE / VALUE RANGE
Sheath marking	Ink-Jet, black
Fiber Color Code (IEC 60304)	1.-12.: red, green, blue, yellow, white, grey, brown, violet, turquoise, black, orange, pink 13.-24.: red, green, blue, yellow, white, grey, brown, violet, turquoise, natural, orange, pink(ring-marked)

MECHANICAL DATA

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE	ACCEPTANCE CRITERIA
Tensile performance - in service	IEC 60794-1-21:E1	n.a.	$\Delta\alpha \leq 0,05$ dB
Tensile performance - during installation	IEC 60794-1-21:E1	4500 N	$\Delta\alpha \leq 0,05$ dB after test
Crush resistance - long term	IEC 60794-1-21:E3A	2000 N/100mm	$\Delta\alpha \leq 0,05$ dB prior release, no damage
Crush resistance - short term	IEC 60794-1-21:E3A	4000 N/100mm	$\Delta\alpha \leq 0,05$ dB after release, no damage
Impact resistance	IEC 60794-1-21:E4	20 Nm, 3 impacts, d=20 mm, R=300 mm	$\Delta\alpha \leq 0,05$ dB after test, no damage
Torsion	IEC 60794-1-21:E7	L = 1 m, rotation angle $\pm 180^\circ$, 10 cycles	no damage
Kink	IEC 60794-1-21:E10		
Cable bend - no tension	IEC 60794-1-21:E11A	d=20 x cable diameter, 4 turns, 3 cycles	$\Delta\alpha \leq 0,05$ dB after test, no damage
Repeated bending	IEC 60794-1-21:E6	R=20 x cable diameter, 25 cycles	no damage

CLIMATICAL DATA

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE	ACCEPTANCE CRITERIA
Temperature cycling	IEC 60794-1-22:F1	-30 °C +70 °C / -22 °F +158 °F	$\Delta\alpha \leq 0,05$ dB
Temperature cycling - reversible	IEC 60794-1-22:F1	-35 °C +70 °C / -31 °F +158 °F	$\Delta\alpha \leq 0,15$ dB, reversible
Temperature range - in service		-30 °C to +70 °C / -22 °F to +158 °F	
Temperature range - during installation		-5 °C +50 °C / +23 °F +122 °F	
Temperature range - in storage & transport		-35 °C to +70 °C / -31 °F to +158 °F	
Moisture resistance	IEC 60794-1-22 F5B	L = 3 m, 1 m water height, 24 h	no water leakage under inner sheath

FIRE PROPERTIES

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE
Flammability - vertical cable bundle	EN 60332-3-22 (cat. A)	Pass
Smoke density	EN 61034-1, EN 61034-2	Pass
Halogen free, acid gases	EN 60754-2	Pass
Euro classification to CPR	EN 50575, EN 13501-6	Dca-s2,d2,a1