



Features

- Up to 48 connections on one height unit (1U)
- Simple patch panel mounting and dismounting for splicing
- Little mounting depth of 225 mm
- Cable entry from the rear or from the side
- Part number: R819764

Technical data

Criteria	Date / value
Rack insert component	19" Cabinets
Connector type	LC-Duplex, SC, SC-Duplex, E-2000™
AIM compatibility	Yes; R&MintelIPhy Ready

Mechanical characteristics

Criteria	Date / value	Standard
Material housing	Steel DC01, 1.0 mm	
Material frontplate	Steel DC01, 1.5 mm / plastic PC-GF10	
Material splice tray	Plastic PC & ABS grey (NCS-S-2502-B)	
Color housing / front plate	Gray (NCS-S-2502-B)	
Vibration resistance	Passed according	IEC 60 068-2-6
Shock resistance	Passed according	IEC 60 068-2-27; test Ea



Environmental characteristics


Criteria	Date / value	Standard
Operation temperature	-10°C to +60°C	
Cold	-10°C, permanent	
Heat	+55°C, permanent	
Humidity	Passed according	IEC 60 068-2-30
IP protection class	IP20	IEC 60529

Optical performance

Optical performance	Date / value
Insertion loss (IL)	See specified connector datasheet
Return loss (RL)	See specified connector datasheet

Dimensions

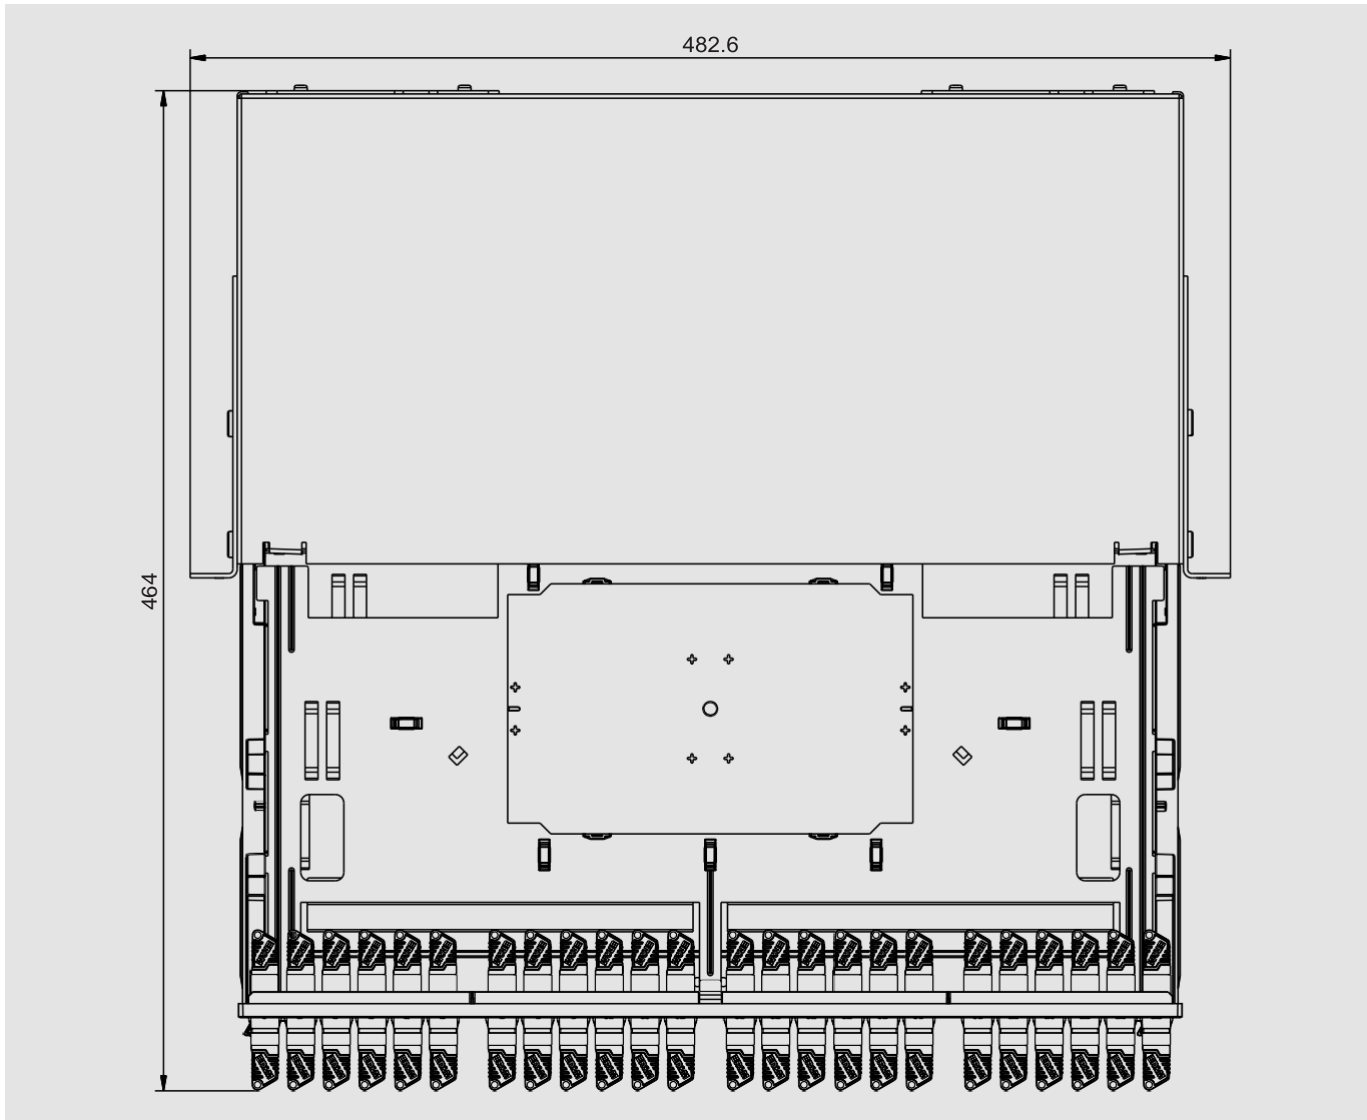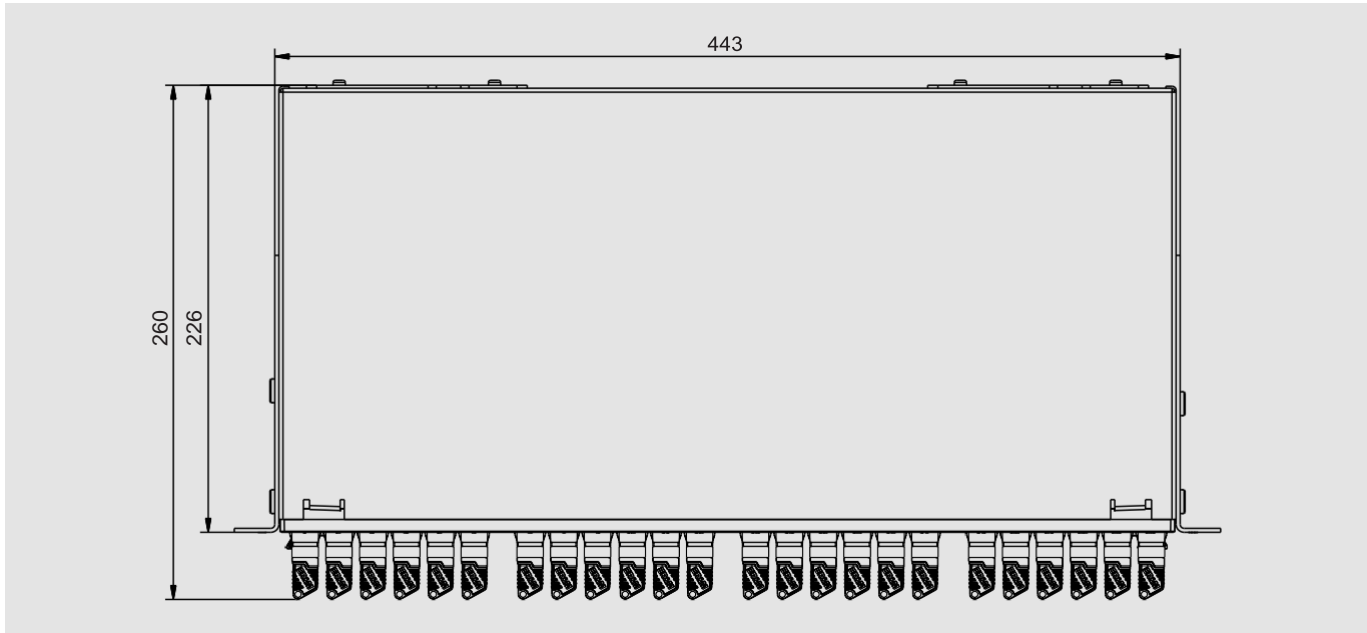

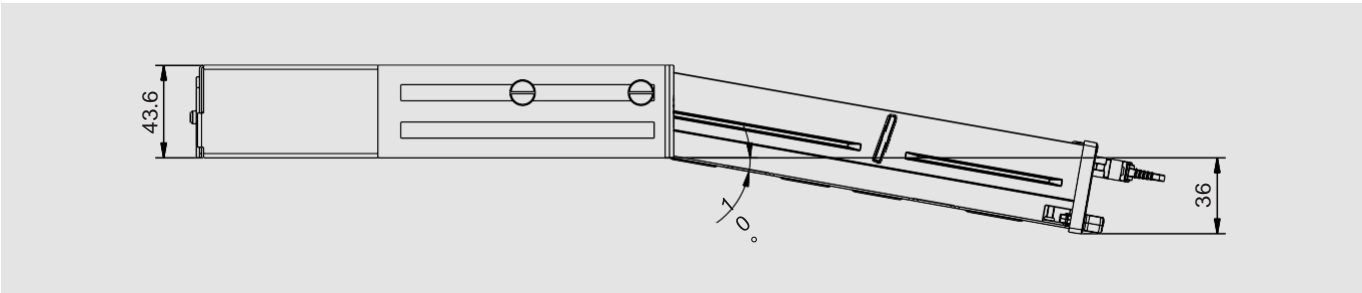

24x E-2000™ / SC / LC Duplex (Plastic front plate IntelliPhy ready)

