


# PRIME-FSU-right-HS-empty

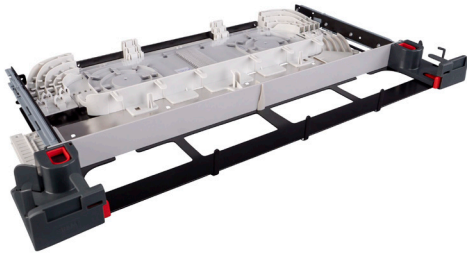

030.6161

## GENERAL DESCRIPTION

3/4U PRIME FSU is a pure splice unit. The basic fiber inlay is suitable for 24/48 HS splice protectors. Up to three additional MCM splice cassettes with 24/48 HS each can be retrofitted. The fiber feed is from the right side and up to 8x5mm transport tubes with a tool-less connection. Suitable for PRIME-3U rack ETSI and 19" rack with rear mounting  
 Max capacity: 96/192 fiber optic terminations

PRODUCT-NO	PRODUCT DESCRIPTION
R849842	PRIME-FSU-right-HS-empty

## SCOPE OF SUPPLY

3/4U FSU-Unit with Fiber inlay  
 4 pcs. Cable ties, small  
 1 pcs. Laser sign, small  
 Installation manual

## TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Mounting	PRIME-3U-Sub-rack, ETSI/19"BM
Assembly	fully populated
Mounting frame type	slid-in unit

## MECHANICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Color	metal sheet (Black-RAL 9005), front and fiber management (light gray-RAL 7035)
Material	metal sheet and plastic
Weight (Kg)	2.36

# PRIME-FSU-right-HS-empty

## CLIMATICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Temperature range - in service	-25 °C to +70 °C / -13 °F to +158 °F
Temperature range - in storage & transport	-40 °C to +85 °C / -40 °F to +185 °F

## FIRE PROPERTIES

DESCRIPTION	VALUE / VALUE RANGE
Halogen free, acid gases	Pass
RoHS	Pass

## TECHNICAL DRAWING

