


Central loose tube cable, universal-use, CSTA - steel tape armour, FRLSZH sheath - green, Dca, 01x08-fibers G657.A1

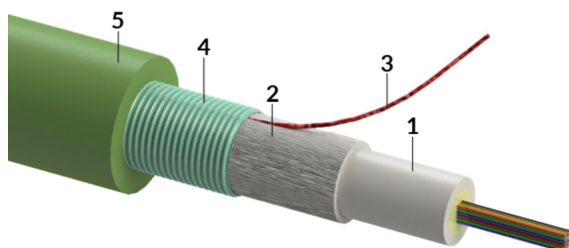

1. Gel filled PBT loose tube with optical fibers
2. Water-blocking e-glass yarn
3. Rip-cord
4. Corrugated steel tape armour
5. FRLSZH UV stable outer jacket

030.6311.B.1/ similar product

PRODUCT-NO	PRODUCT CODE
R855769	CLT-D01x3.0-QEONS-C1H_U-SDNF-01x08-S7-gn
CABLE TYPE	CABLE VERSION
Central loose tube cable	n.a
CABLE APPLICATION	DIN/VDE CODE
universal-use	U-DQ(ZN)(SR)H wbg
CPR CLASSIFICATION	DOP NO.:
Dca-s2,d2,a1	D9026

GENERAL DESCRIPTION

Corrugated steel tape armoured central loose tube cable with good mechanical and thus full rodent protection. With up to 24 fibers maximum, suitable for indoor or outdoor duct or direct buried installation.

TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Fiber type	G.657.A1
Fiber count	8
Loose-tube count	1
Loose tube nominal diameter	3
Outer jacket nominal thickness	1.2
Cable outer diameter	7.7
Cable informative weight	84.0 kg/km / 56 lbs/1000ft
Standard put-up length on drum	2100 m ± 5%
Outer jacket material	UV stable FRLSZH
Jacket colour	green
Sheath marking	Ink-Jet, black

Central loose tube cable, universal-use, CSTA - steel tape armour, FRLSZH sheath - green, Dca, 01x08-fibers G657.A1

MECHANICAL DATA

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE	ACCEPTANCE CRITERIA
Tensile performance - in service	IEC 60794-1-21:E1	500 N	$\Delta\alpha \leq 0,05$ dB
Tensile performance - during installation	IEC 60794-1-21:E1	1500 N	$\Delta\alpha \leq 0,05$ dB after test
Crush resistance - long term	IEC 60794-1-21:E3A	2500 N/100mm	$\Delta\alpha \leq 0,05$ dB prior release, no damage
Crush resistance - short term	IEC 60794-1-21:E3A	5000 N/100mm	$\Delta\alpha \leq 0,05$ dB after release, no damage
Impact resistance	IEC 60794-1-21:E4	20 Nm, 3 impacts, d=20 mm, R=300 mm	$\Delta\alpha \leq 0,05$ dB after test, no damage
Torsion	IEC 60794-1-21:E7	L = 1 m, rotation angle $\pm 180^\circ$, 10 cycles	no damage
Kink	IEC 60794-1-21:E10		
Cable bend - no tension	IEC 60794-1-21:E11A	d=20 x cable diameter, 4 turns, 3 cycles	$\Delta\alpha \leq 0,05$ dB after test, no damage
Repeated bending	IEC 60794-1-21:E6	R=20 x cable diameter, 25 cycles	no damage

CLIMATICAL DATA

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE	ACCEPTANCE CRITERIA
Temperature cycling	IEC 60794-1-22:F1	-30 °C +70 °C / -22 °F +158 °F	$\Delta\alpha \leq 0,05$ dB
Temperature cycling - reversible	IEC 60794-1-22:F1	-35 °C +70 °C / -31 °F +158 °F	$\Delta\alpha \leq 0,15$ dB, reversible
Temperature range - in service		-30 °C to +70 °C / -22 °F to +158 °F	
Temperature range - during installation		-5 °C +50 °C / +23 °F +122 °F	
Temperature range - in storage & transport		-35 °C to +70 °C / -31 °F to +158 °F	
Moisture resistance	IEC 60794-1-22 F5B	L = 3 m, 1 m water height, 24 h	no water leakage

FIRE PROPERTIES

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE
Flammability - vertical cable bundle	EN 60332-3-22 (cat. A)	Pass
Smoke density	EN 61034-1, EN 61034-2	Pass
Halogen free, acid gases	EN 60754-2	Pass
Euro classification to CPR	EN 50575, EN 13501-6	Dca-s2,d2,a1