


Central loose tube cable, universal-use, imp. rodent protection, FRLSZH sheath - green, Dca, 01x04-fibers OM1

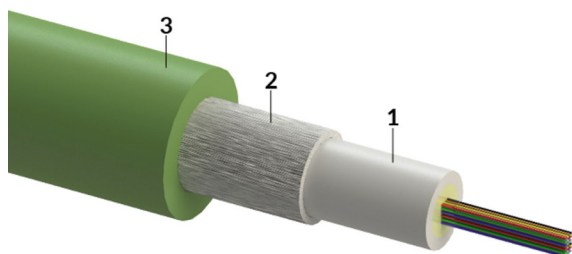

1. Gel filled PBT loose tube with optical fibers
2. Water-blocking e-glass yarn
3. FRLSZH UV stable outer jacket

030.6309.B.1/ similar product

PRODUCT-NO	PRODUCT CODE
R855600	CLT-D01x2.3-QEONS-G1H_U-SDNF-01x04-M1-gn
CABLE TYPE	CABLE VERSION
Central loose tube cable	n.a
CABLE APPLICATION	DIN/VDE CODE
universal-use	U-DQ(BN)H wbg
CPR CLASSIFICATION	DOP NO.:
n.a	D9013

GENERAL DESCRIPTION

Non-metallic central loose tube cable with improved rodent protection. With up to 12 fibers maximum, suitable for indoor or outdoor duct installation.

TECHNICAL DATA

DESCRIPTION	VALUE / VALUE RANGE
Fiber type	OM1
Fiber count	4
Loose-tube count	1
Loose tube nominal diameter	2.3
Outer jacket nominal thickness	1.1
Cable outer diameter	6.2
Cable informative weight	37.0 kg/km / 25 lbs/1000ft
Jacket colour	green
Fiber Color Code (IEC 60304)	1.-12.: red, green, blue, yellow, white, grey, brown, violet, turquoise, black, orange, pink

Central loose tube cable, universal-use, imp. rodent protection, FRLSZH sheath - green, Dca, 01x04-fibers OM1

MECHANICAL DATA

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE	ACCEPTANCE CRITERIA
Tensile performance - in service	EN 60794-1-21:E1	600 N	$\Delta\alpha \leq 0,05$ dB
Tensile performance - during installation	IEC 60794-1-21:E1	1800 N	$\Delta\alpha \leq 0,05$ dB after test
Crush resistance - long term	IEC 60794-1-21:E3A	1000 N/100mm	$\Delta\alpha \leq 0,05$ dB prior release, no damage
Crush resistance - short term	IEC 60794-1-21:E3A	2000 N/100mm	$\Delta\alpha \leq 0,05$ dB after release, no damage
Impact resistance	IEC 60794-1-21:E4	10 Nm, 3 impacts, d=20 mm, R=300 mm	$\Delta\alpha \leq 0,05$ dB after test, no damage
Torsion	IEC 60794-1-21:E7	L = 1 m, rotation angle $\pm 180^\circ$, 10 cycles	no damage
Kink	IEC 60794-1-21:E10		
Cable bend - no tension	IEC 60794-1-21:E11A	d=20 x cable diameter, 4 turns, 3 cycles	$\Delta\alpha \leq 0,05$ dB after test, no damage
Repeated bending	IEC 60794-1-21:E6	R=20 x cable diameter, 25 cycles	no damage

CLIMATICAL DATA

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE	ACCEPTANCE CRITERIA
Temperature cycling	IEC 60794-1-22:F1	-30 °C 70 °C / -22 °F +158 °F	$\Delta\alpha \leq 0,05$ dB
Temperature cycling - reversible	IEC 60794-1-22:F1	-35 °C 70 °C / -31 °F +158 °F	$\Delta\alpha \leq 0,05$ dB after test
Temperature range - in service		-30 °C to 70 °C / -22 °F to +158 °F	
Temperature range - during installation		-5 °C +50 °C / +23 °F +122 °F	
Temperature range - in storage & transport		-35 °C to 70 °C / -31 °F to +158 °F	
Moisture resistance	IEC 60794-1-22 F5B	L = 3 m, 1 m water height, 24 h	no water leakage

FIRE PROPERTIES

DESCRIPTION	TEST METHOD	VALUE / VALUE RANGE
Euro classification to CPR		n.a