



ZrO₂ ≥ 95%, Y = 3Mol%
 E-Modul: typ. 206GPa (203-225GPa)
 Poisson's Ratio: 0.31
 Grain size: < 0.45µm

2,5mm Ferrules APC

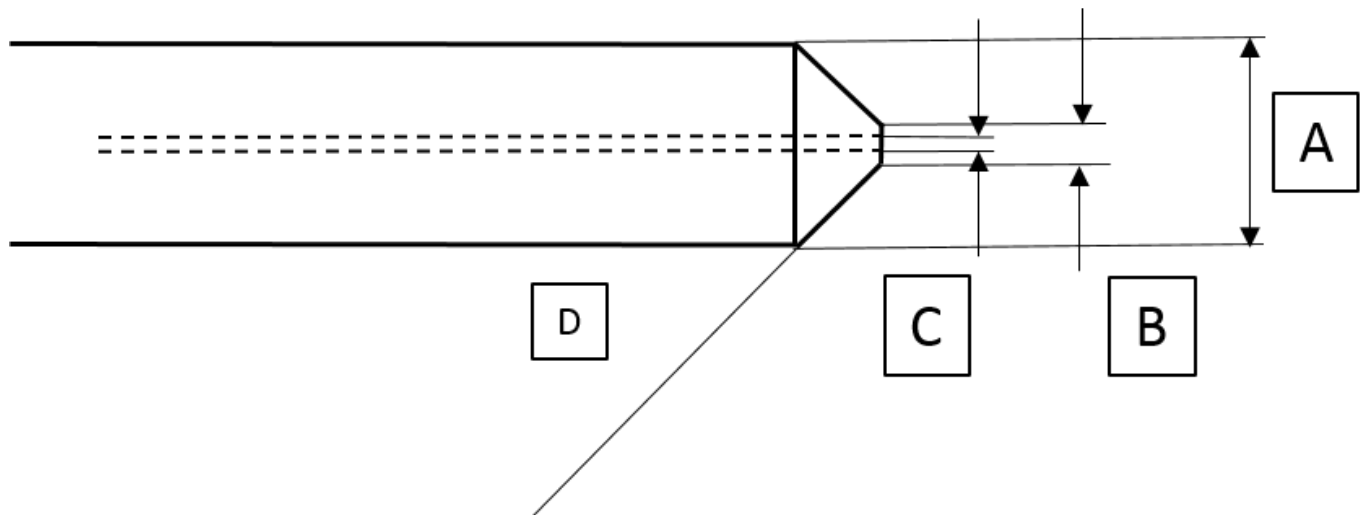


Ferrulen 2,5mm APC	A	B	C	D
Premium	2,499mm	0,5mm ± 0,1mm	125,2-125,7µm C 0,5µm	45° ± 1°
Standard	2,499mm	0,5mm ± 0,1mm	126,0-127,0µm C 1,0µm	45° ± 1°

2,5mm Ferrulen PC

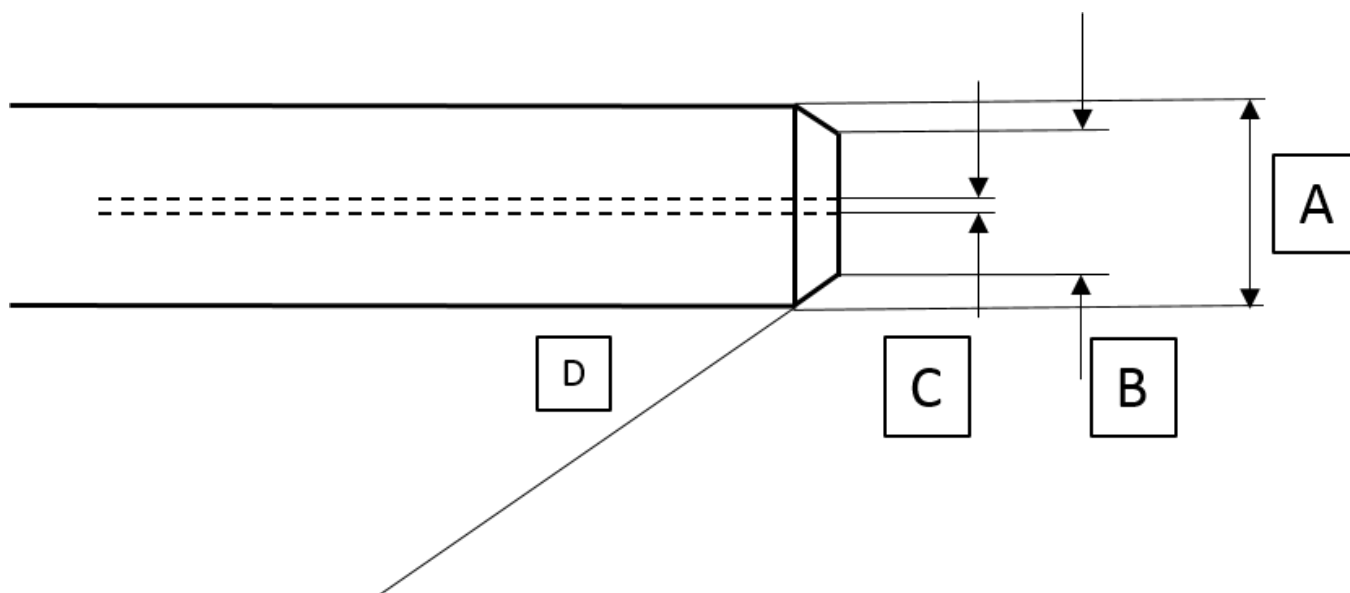

Ferrules 2,5mm PC	A	B	C	D
Premium Singlemode	2,499mm	2,0mm ± 0,2mm	125,2-125,7µm C 0,5µm	25° ± 1°
Standard Singlemode	2,499mm	2,0mm ± 0,2mm	126,0-127,0µm C 1,0µm	25° ± 1°
Premium Multimode	2,499mm	2,0mm ± 0,2mm	127,0-130,0µm C 4,0µm	25° -50°
Standard Multimode	2,499mm	2,0mm ± 0,2mm	127,0-130,0µm C 4,0µm	25° -50°

1,25mm Ferrules APC / PC

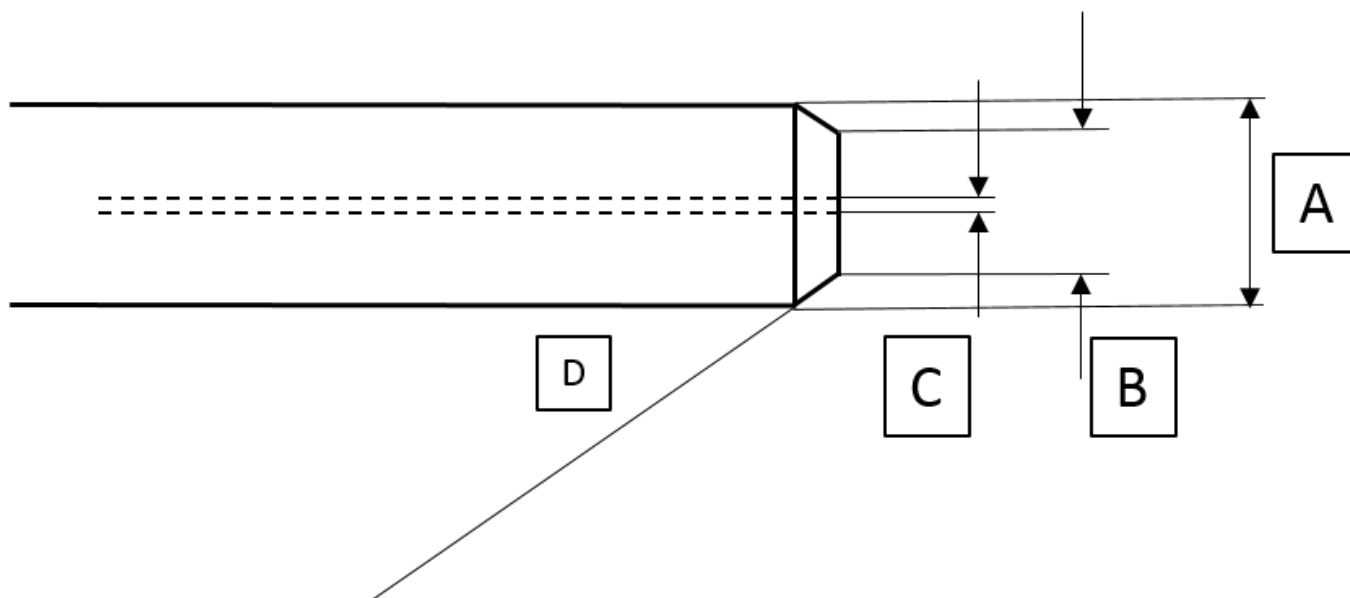

Ferrulen 1,25mm APC / PC	A	B	C	D
Premium Singlemode	1,249mm	0,6mm ± 0,15mm	125,2-125,7µm C 0,5µm	35° ± 2,5°
Standard Singlemode	1,249mm	0,6mm ± 0,15mm	126,0-127,0µm C 1,0µm	35° ± 2,5°
Premium Multimode	1,249mm	0,6mm ± 0,15mm	127,0-130,0µm C 4,0µm	35° ± 2,5°
Standard Multimode	1,249mm	0,6mm ± 0,15mm	127,0-130,0µm C 4,0µm	35° ± 2,5°